


### LED Full Color Outdoor Message Board DT-320x160 P8 Slim

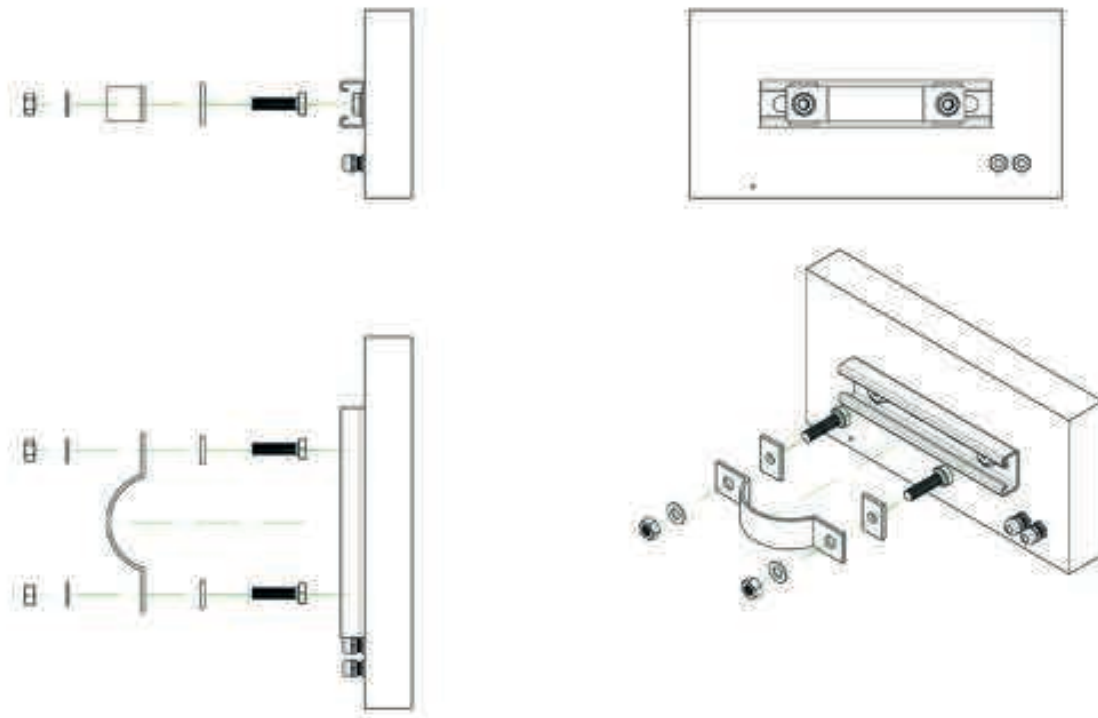


## FEATURES





- Full color and full matrix high quality LED SMD arrays
- Supported media: text with various effects, png, moving gif
- Verified high-end components
- Fanless design for extra durability

# TECHNICAL DATA SHEET

## USAGE

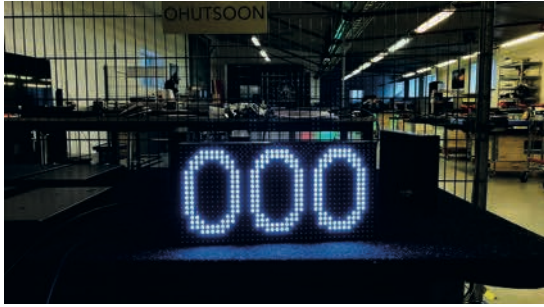

## CONTENT EXAMPLES

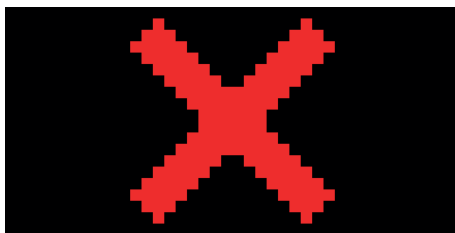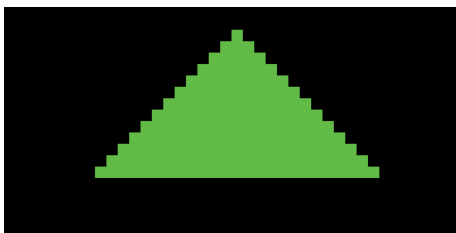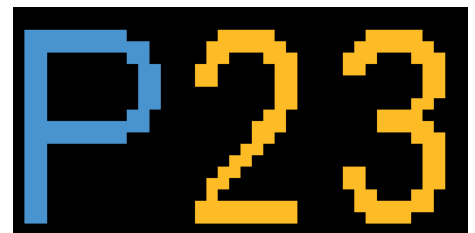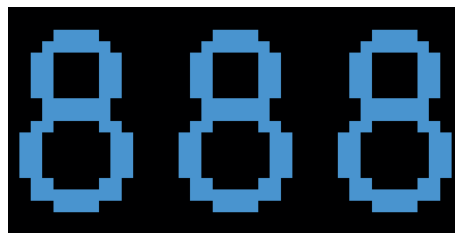


## COMMUNICATION

Our proprietary software based communication protocol guarantees fully autonomous operation modes even in complicated server integrated solutions. See our API for more about protocol configurations at <http://api.ampron.eu>

## KEY PROPERTIES

- Integration with third party systems via HTTP, FTP, MODBUS, XML, RS485, etc.
- Alerts, Warnings and Status messages and events generation
- Autonomous dynamic variable message display
- Monitoring and logging

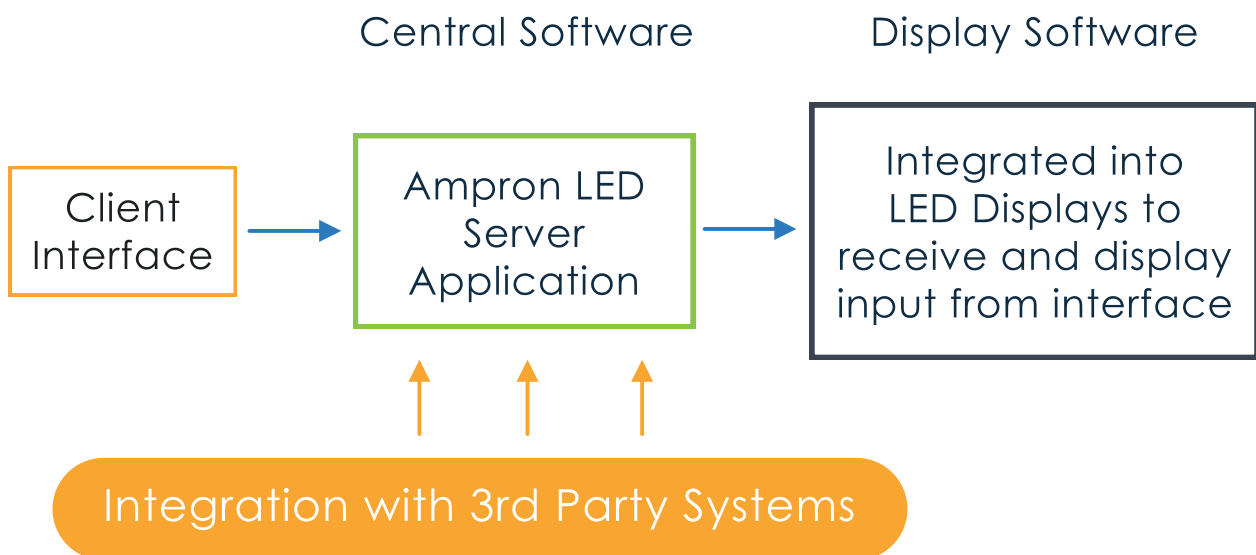

## OPTIONAL EXTRAS

- Brightness sensor
- WiFi, GPRS, 4G and 5G connectivity
- Custom software for Client specific integrations
- Secure Socket Layer (SSL) communication
- Extended warranty
- Indoor version



# RUGGED LED MESSAGE BOARD FOR OUTDOOR USE

## TECHNICAL SPECIFICATION

Model Type	DT-320x160 P8 Slim
Pixel Pitch	P8
Resolution	40x20 pixels
Brightness	5500 nits
Viewing angle	H:140 V:120
Color	16 bit/color
Interface port	LAN CAT 5/5e/6
Display Area Dimensions (WxH)	320x160 mm
Dimensions (WxHxD)	323x163x41 mm
Min. Viewing distance	8 meters
Operation	24/7
Operating Temperature	-35°C ... +50
Input Voltage	240VAC
Power Consumption max	30W/m <sup>2</sup>
Power Consumption avg.	15 W/m <sup>2</sup>
IP Rating	IP 65
Weight	~1,25 kg
Serviceability	Front
Certification	CE, RoHS
Warranty	1 year