


OUTDOOR GOLD

Model Type	Outdoor Gold P4	Outdoor Gold P5	Outdoor Gold P8	Outdoor Gold P10
Pixel Pitch	4mm	5mm	8mm	10mm
Brightness	6000 nits	6000 nits	6500 nits	7000 nits
Min. Viewing distance	4 meters	5 meters	8 meters	10 meters
Power Consumption max	909 W/m ²	836 W/m ²	866 W/m ²	850 W/m ²
Refresh rate	≥3840			
LED modules	RGB SMD LED			
Contrast	5000:1			
Area	1m ²			
Frame material	Magnesium Alloy			
Operating Temperature	-20°C ... +50			
Input Voltage	240VAC			
Weight	33kg			
Viewing angle	H:140 V:130			
Color	16 bit/color			
Interface port	LAN CAT 5/5e/6			
Dimensions (WxHxD)	960x960x90 mm			
IP Rating	IP 65			
Serviceability	Front			
MTBF	>10,000 hours			
Life span	≥100,000 hours (50% brightness)			
Certification	CE, RoHS			
Warranty	1 year			

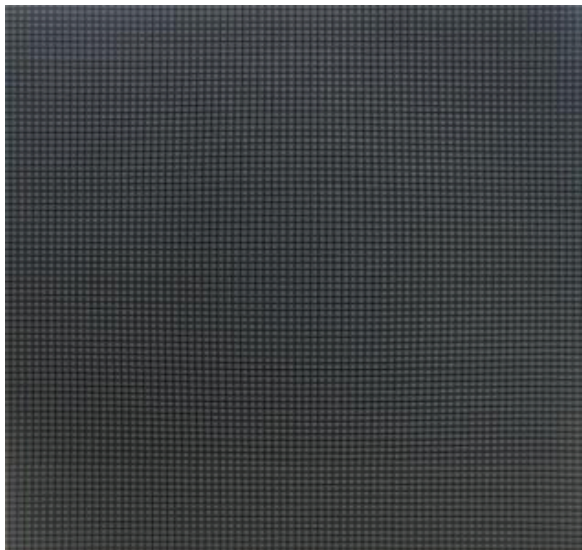

Packages

	Bronze	Silver	Gold
Price	- 20% from gold	- 10% from gold	rate card price
Payment conditions	100% prepayment	70% prepayment	60% prepayment
LED SMD	Copper wire	Copper wire	Golden wire
Refresh rate	1920Hz	1920Hz	3840Hz
Maximum brightness	- 20% from gold	- 20% from gold	rate card value
MTBF	>5,000 hours	>7,000 hours	>10,000 hours
Life span	≥50,000 hours	≥70,000 hours	≥100,000 hours
Energy efficiency	- 20% from gold	- 20% from gold	100%
Shipment	180 days	150 days	90 days
Factory burn-in tests	24 hrs	48 hrs	72 hrs
Midlife upgrade need	after 3 years	after 5 years	after 7 years
Midlife upgrade discount	0%	-10%	-20%